

HD27035

800MHz–1000MHz, 1W RF Amplifier


Features

- Frequency Range: 800-1000MHz
- Gain: 30dB
- P_{out}: +30dBm
- IP3: +47dBm
- Noise Figure: 5.5dB
- Input VSWR: 1.3:1
- DC Power: 5V
- SMA Connector

Performance Tested @ 900MHz

Description

HD27035 is +30dBm (1W) output RF Amplifier operates with frequency range from 800MHz to 1000MHz.

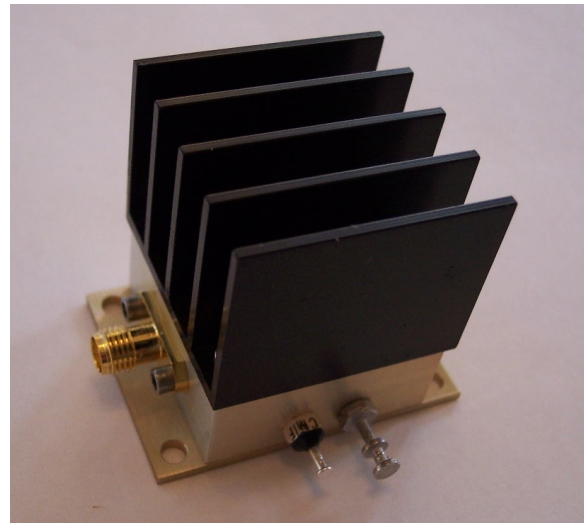

Electrical Specifications @ +25 °C, Z_s = Z_L = 50 Ω, V_{cc}=+5V







Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	MHz	800		1000
Small Signal Gain	f = 800MHz		31.5	
	f = 850MHz		31.5	
	f = 900MHz		31.0	
	f = 950MHz		30.5	
	f = 1000MHz		30.0	
Gain Flatness	dB		± 2.0	
P _{out} @ P _{in} = +2dBm	dBm		+30	
OIP3	dBm		+47	
Noise Figure at 900MHz	dB		5.5	
Reverse Isolation	dB		-40	
VSWR Input			1.3:1	
DC Power Supply	V	4.5	5.0	5.5
Supply Current Quiescent (no RF)	mA		400	

HD27035

800MHz–1000MHz, 1W RF Amplifier

@ P _{out} = +30dBm	mA	700	
-----------------------------	----	-----	--







Typical Performance @ +25 °C

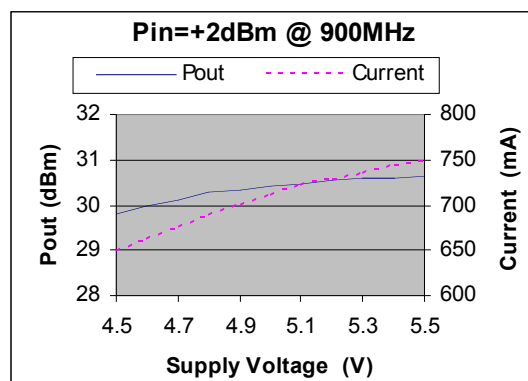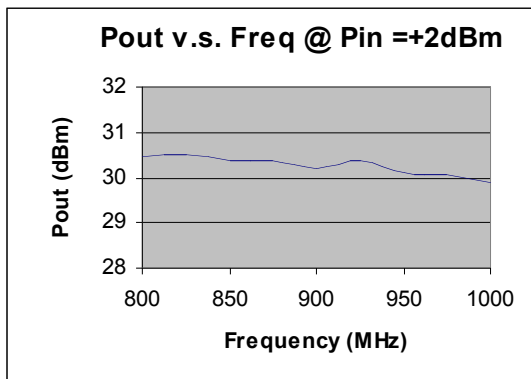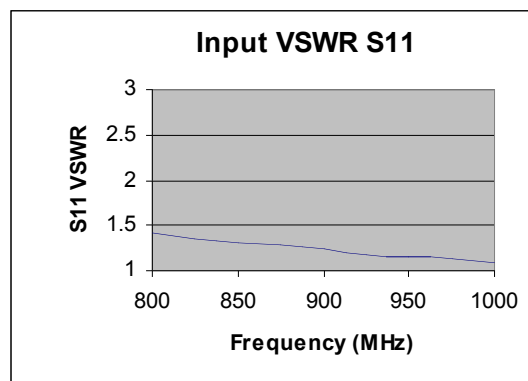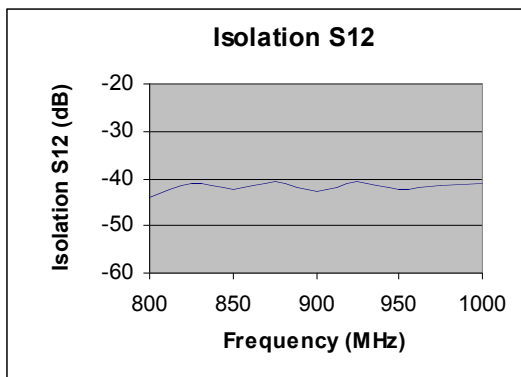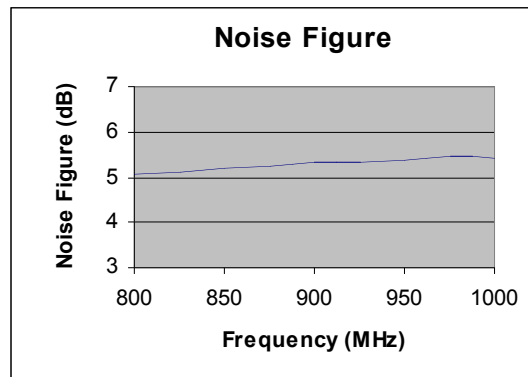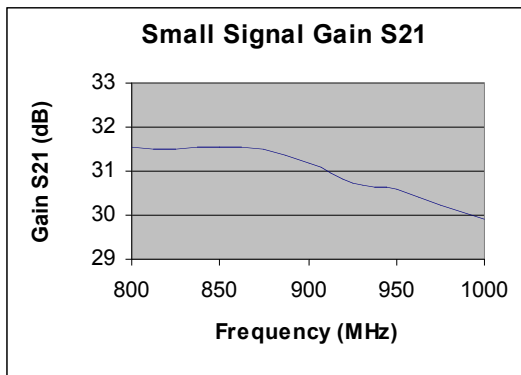

HD27035

800MHz–1000MHz, 1W RF Amplifier







Typical Performance @ +25 °C

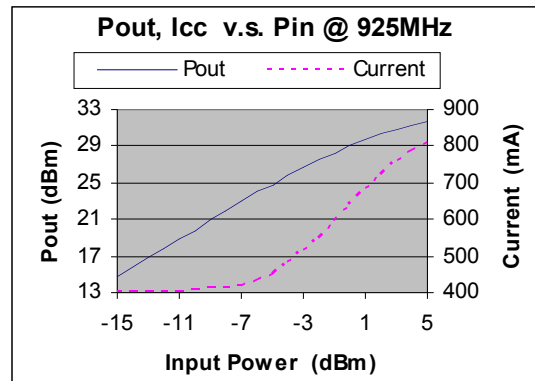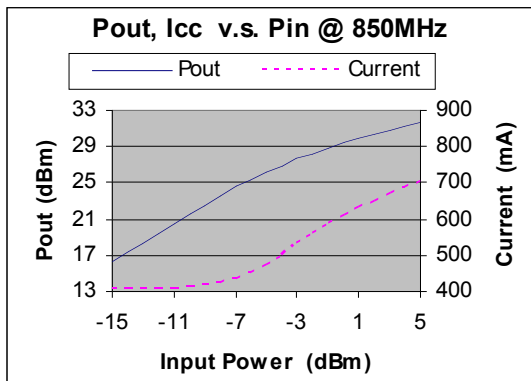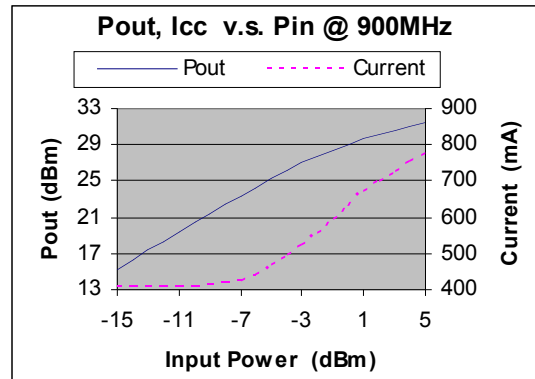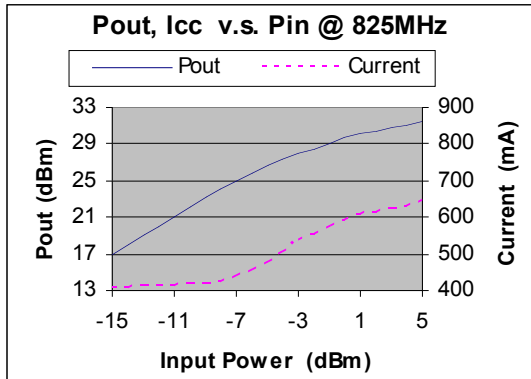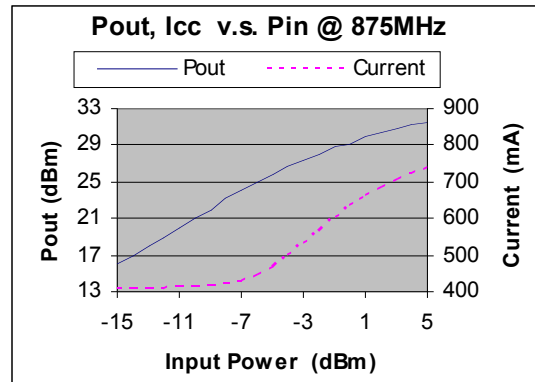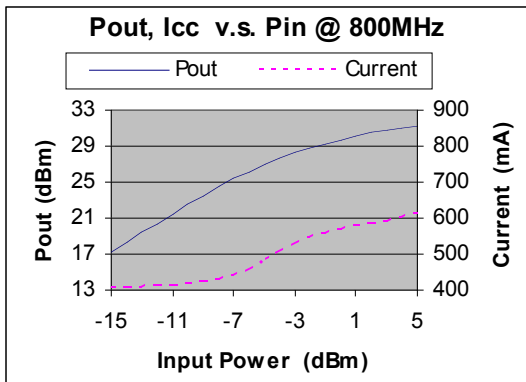

HD27035

800MHz–1000MHz, 1W RF Amplifier

Typical Performance @ +25 °C

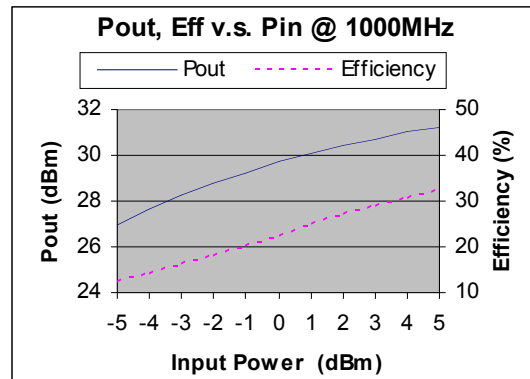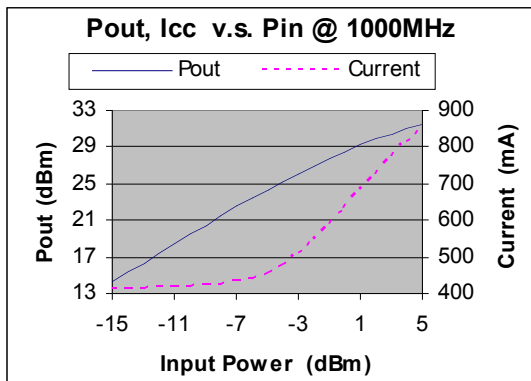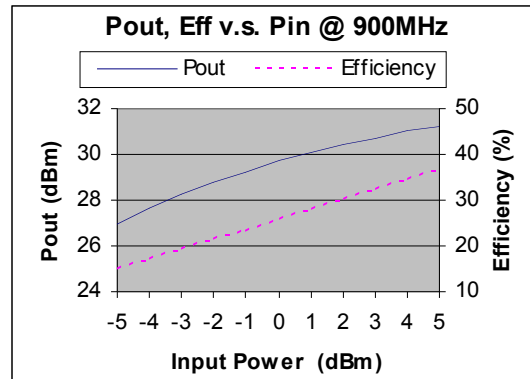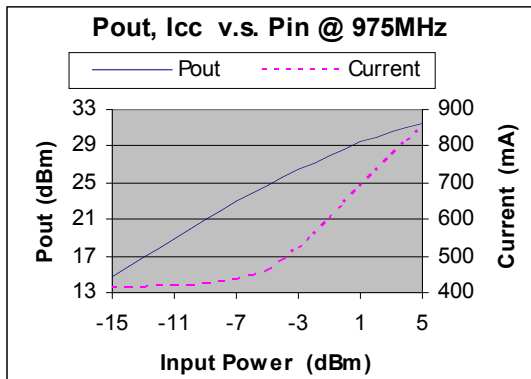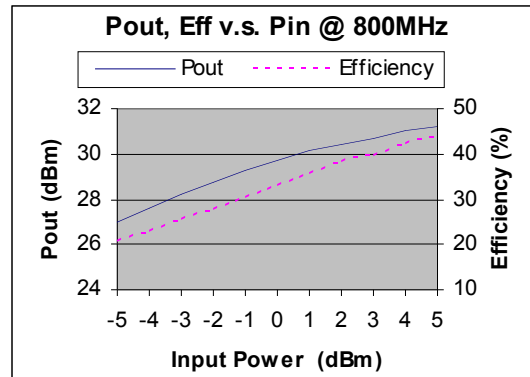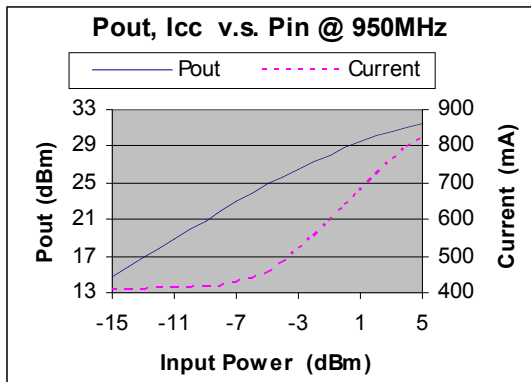


HD27035

800MHz–1000Mhz, 1W RF Amplifier

Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Input Power	+10dBm
Supply Voltage	+6V
Operating Temperature	-40 °C to +85 °C
Storage Temperature	-55 °C to +100 °C

Outline

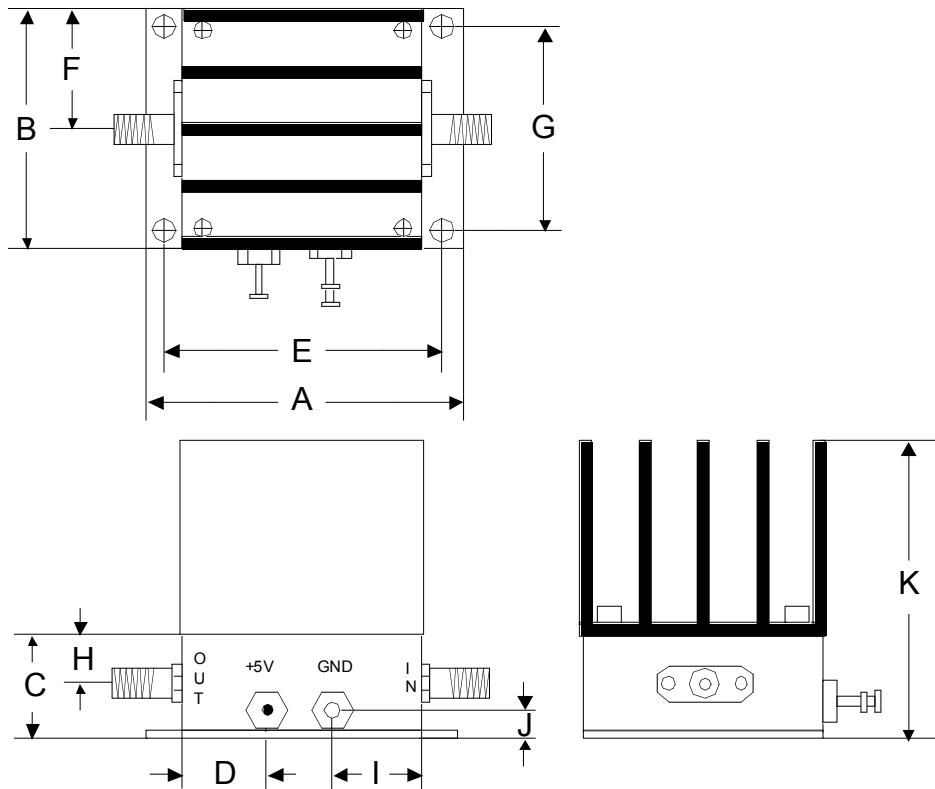

	A	B	C	D	E	F	G	H	I	J	K
Inch	1.250	1.250	0.563	0.450	1.000	0.625	1.000	0.250	0.500	0.187	1.563
mm	31.75	31.75	14.29	11.43	25.40	15.88	25.40	6.35	12.70	4.76	39.70