


Features

- Center Frequency: 905MHz
- Bandwidth: 26MHz
- Insertion Loss: 2dB
- Input/Output Impedance: 50Ω
- Maximum Input Power: +20dBm
- SAW Technology
- SMA Connector

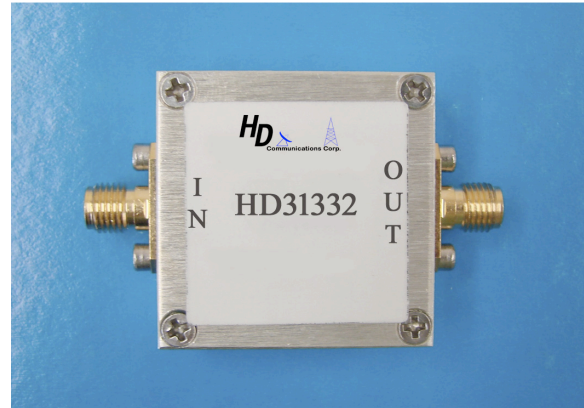

Description


HD31332 is a 892-918MHz SAW Band Pass Filter for 900MHz ISM Band application.

Electrical Specifications @ +25 °C, $Z_S = Z_L = 50 \Omega$



Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	MHz	892		918
Center Frequency	MHz		905	
Insertion Loss	dB		2.0	3.0
Rejection at 860MHz	dB		35	
Rejection at 950MHz	dB		35	
Maximum Input Power	dBm			+20
Maximum Input DC Voltage	V			0
Input/output impedance	Ω		50	
Group Delay	ns		22	
Group Delay Ripple	ns		± 5	
VSWR	Input VSWR Output VSWR		1:1.8 1:1.8	
Size (excluding SMA connectors)	inch	1.25" x 1.25" x 0.56"		
Weight	oz	1.5		

Note: Input and output ports are interchangeable



Insertion Loss and Rejection:

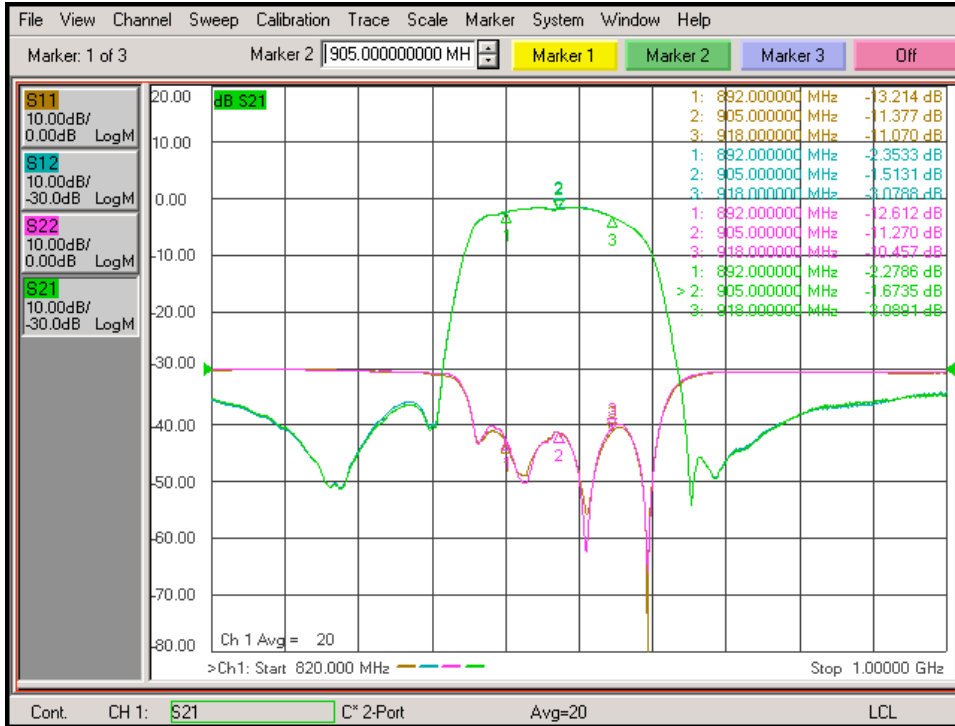



Insertion Loss and Rejection:

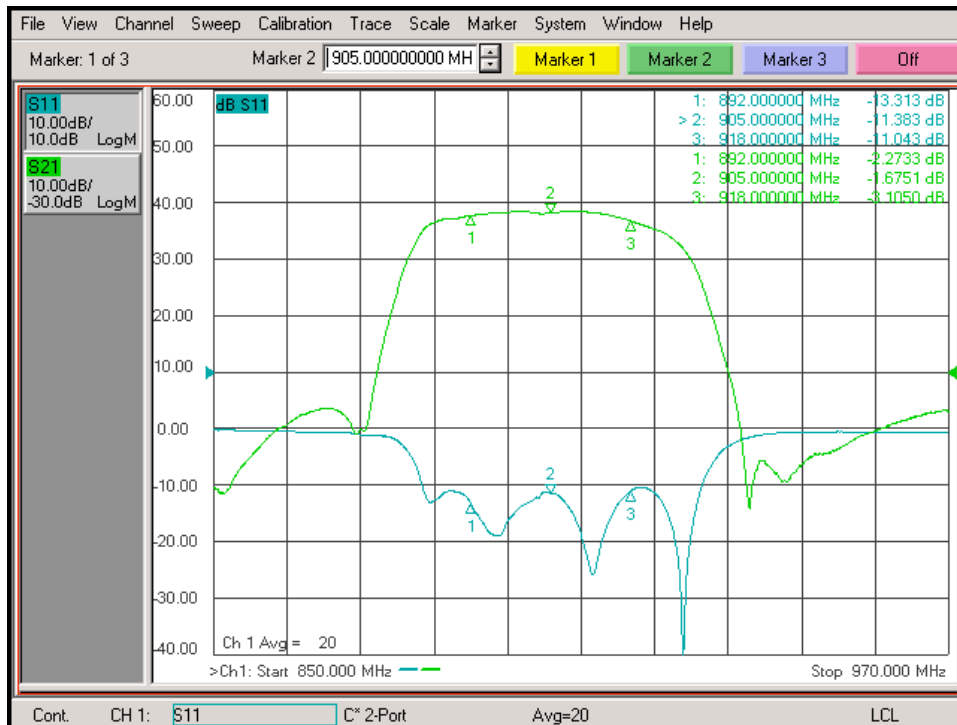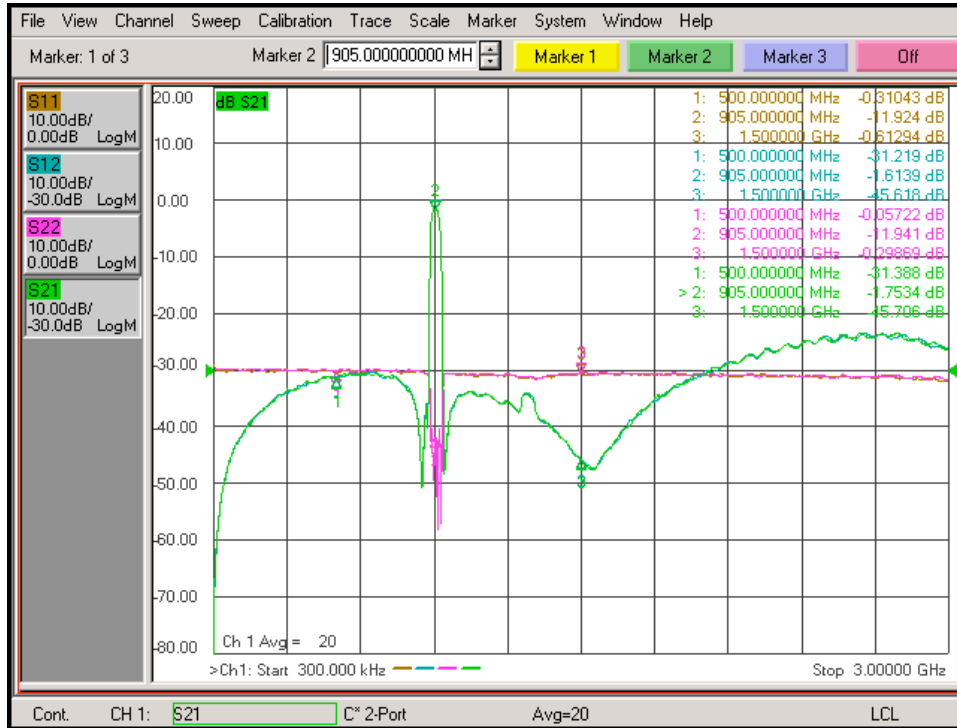

Delay and Phase:

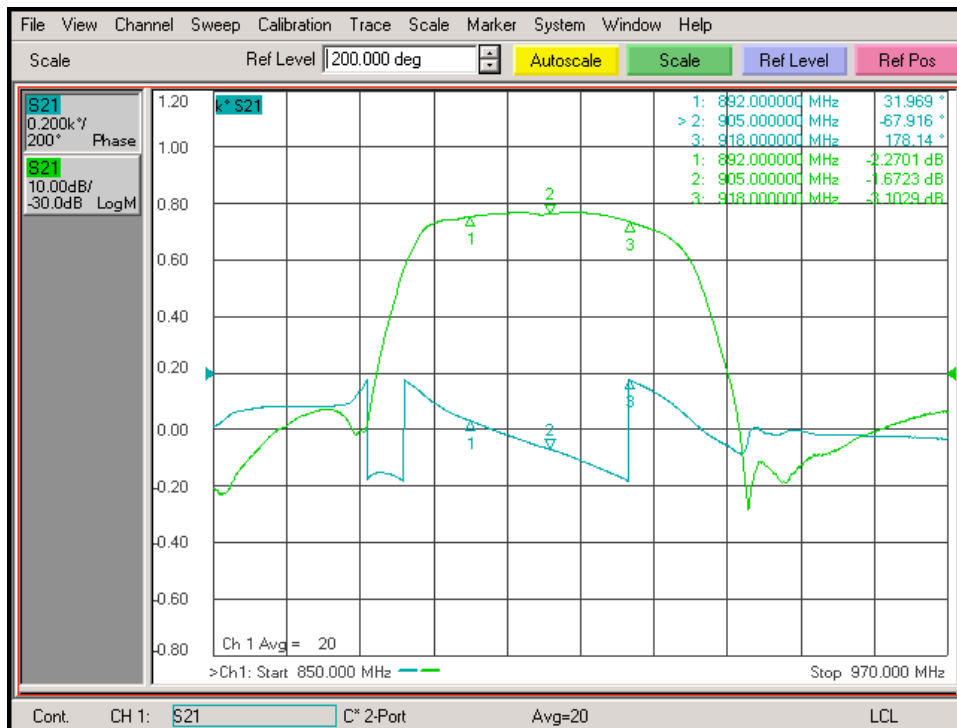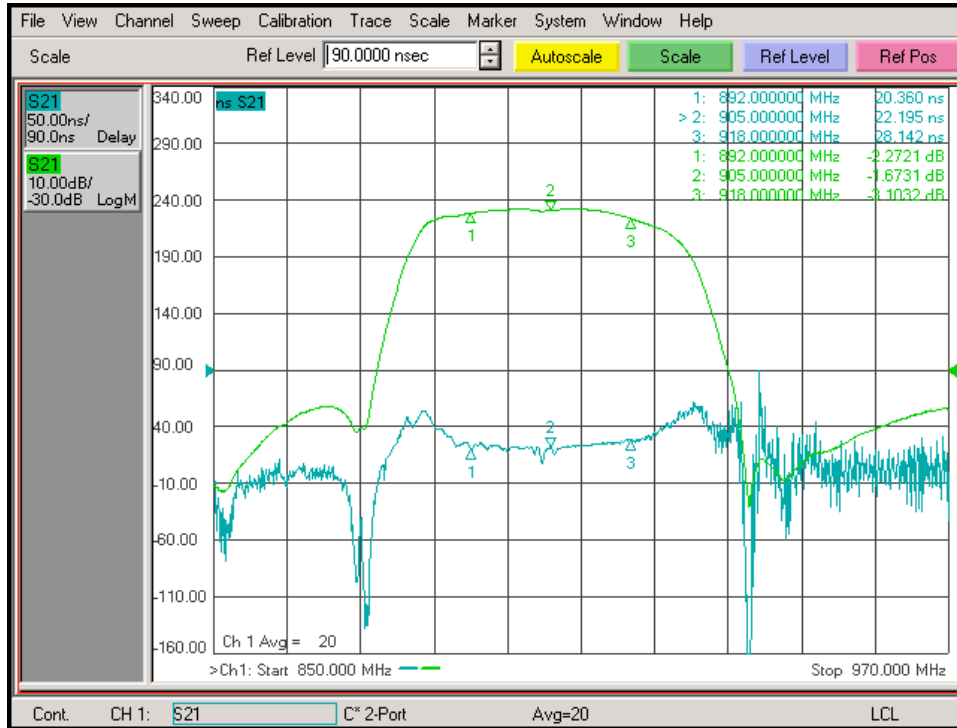


Smith Chart and VSWR:

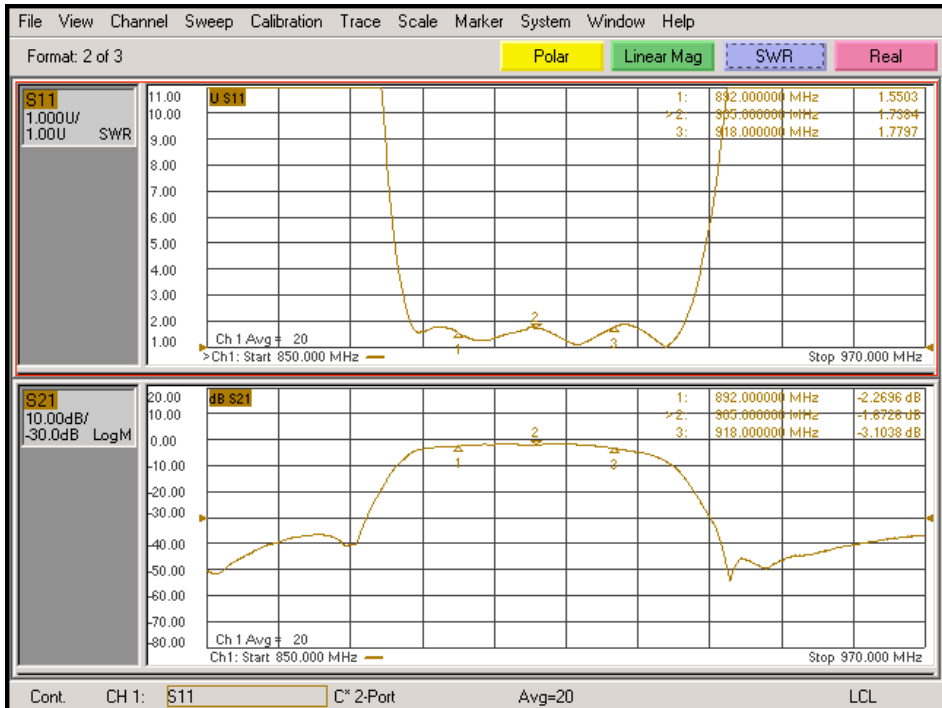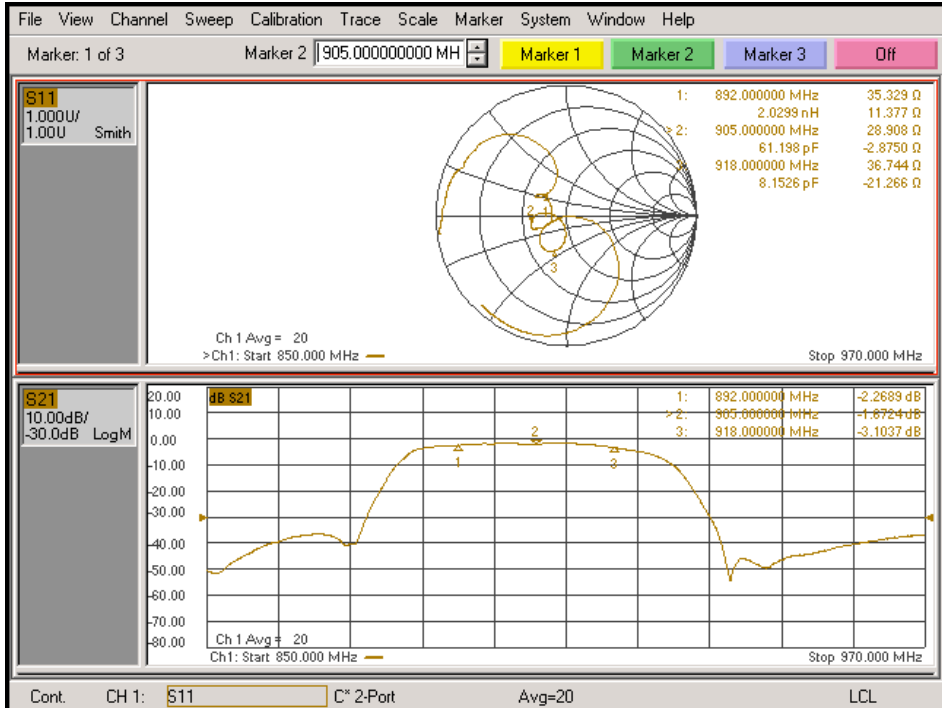

Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Input Power	+20dBm
DC Input Voltage	0V
Operating Temperature	-30 °C to +85 °C
Storage Temperature	-40 °C to +100 °C

Outline

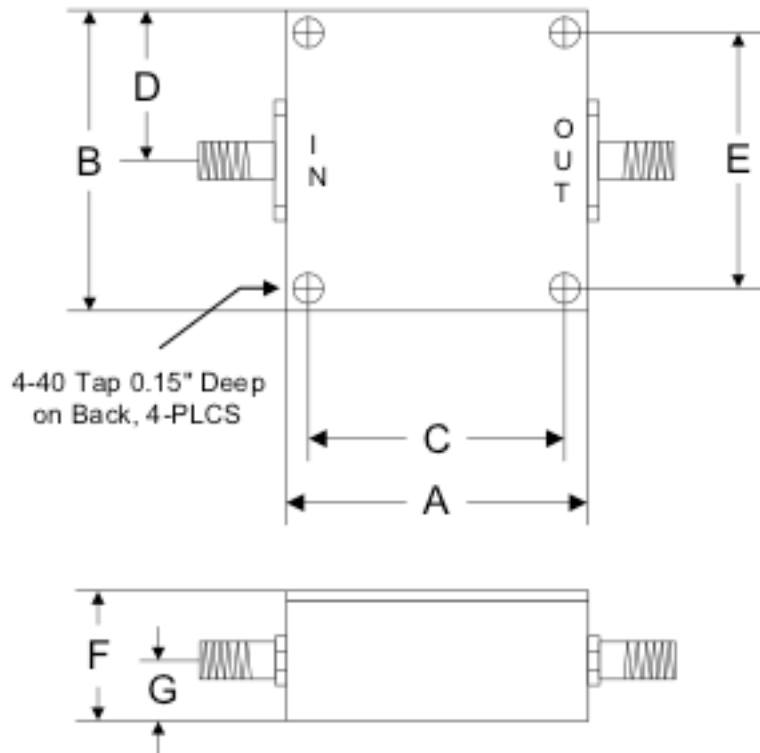

	A	B	C	D	E	F	G
Inch	1.250	1.250	1.000	0.625	1.000	0.563	0.250
mm	31.75	31.75	25.40	15.88	25.40	14.29	6.35