



# HD30361 SOLID STATE HIGH POWER AMPLIFIER

**PRELIMINARY**

## FEATURES

- Class AB linear GaN design
- Instantaneous wide bandwidth
- Suitable for all modulations standards
- Small form factor & light weight
- Built-in protection circuits
- High reliability and ruggedness

## ELECTRICAL SPECIFICATIONS

Parameter	Specification	Notes
Operating Frequency Range	1.0 - 6.0 GHz	
Power Output	100 Watt Min	CW
Power Output @ P1dB	TBD Watt Min	CW
Power Gain	50 dB Min	
Power Gain Flatness	3.0 dB p-p Max	Constant input power
Input / Output Return Loss	10 dB Min	Relative to 50 Ohm
2-Tone Intermodulation (IMD)	>30 dBc Typ	40 dBm/Tone, $\Delta = 1$ MHz
Harmonics	>20 dBc Typ	At rated Pout
Non Harmonics Spurious	>60 dBc	
Operating Voltage	48 VDC Nom	28V Opt Available
Power Consumption	670 Watt Max	At rated Pout
Max Input Power	+8 dBm	Without damage
Load VSWR Protection	$\infty : 1$	
Turn On / Off Speed	5 $\mu$ Sec Max	

## ENVIRONMENTAL CHARACTERISTICS

Parameter	Specification	Notes
Operating Case Temperature	-20 to +75 °C	
Storage Temperature	-40 to +85 °C	
Relative Humidity	5 to 95 %	Non Condensing

## MECHANICAL SPECIFICATIONS

Parameter	Specification	Notes
Dimensions	360 x 220 x 27 mm	Excluding Connectors
Weight	TBD Kg.	
RF Connectors In/Out	SMA female	
DC Power / Interface Connector	7-Pin Hybrid D-Sub	
Cooling	External Heatsink	Forced air required



# HD30361 SOLID STATE HIGH POWER AMPLIFIER

**PRELIMINARY**

## D-SUB CONNECTOR PIN ASSIGNMENT


Pin	Function	Description
1	FWD	OPTION 101 - Forward power detect
2	VVA	OPTION 103 - Variable Voltage Attenuator
3	CURRENT SENSOR	$I_D @ 20mV/100mA$ Typ
4	TEMP SENSOR	$V_T @ 10mV/^{\circ}C + 500mV$ Typ
5	SHUTDOWN	TTL
A1	VDD	28VDC
A2	GND	Ground

## OPTION ORDERING INFORMATION:

OPTION	Function	Description
101	FWD	Forward power detect
103	VVA	Variable Voltage Attenuator
108	V28	+28VDC Operation

PRELIMINARY

Outline Drawing - Standard Module

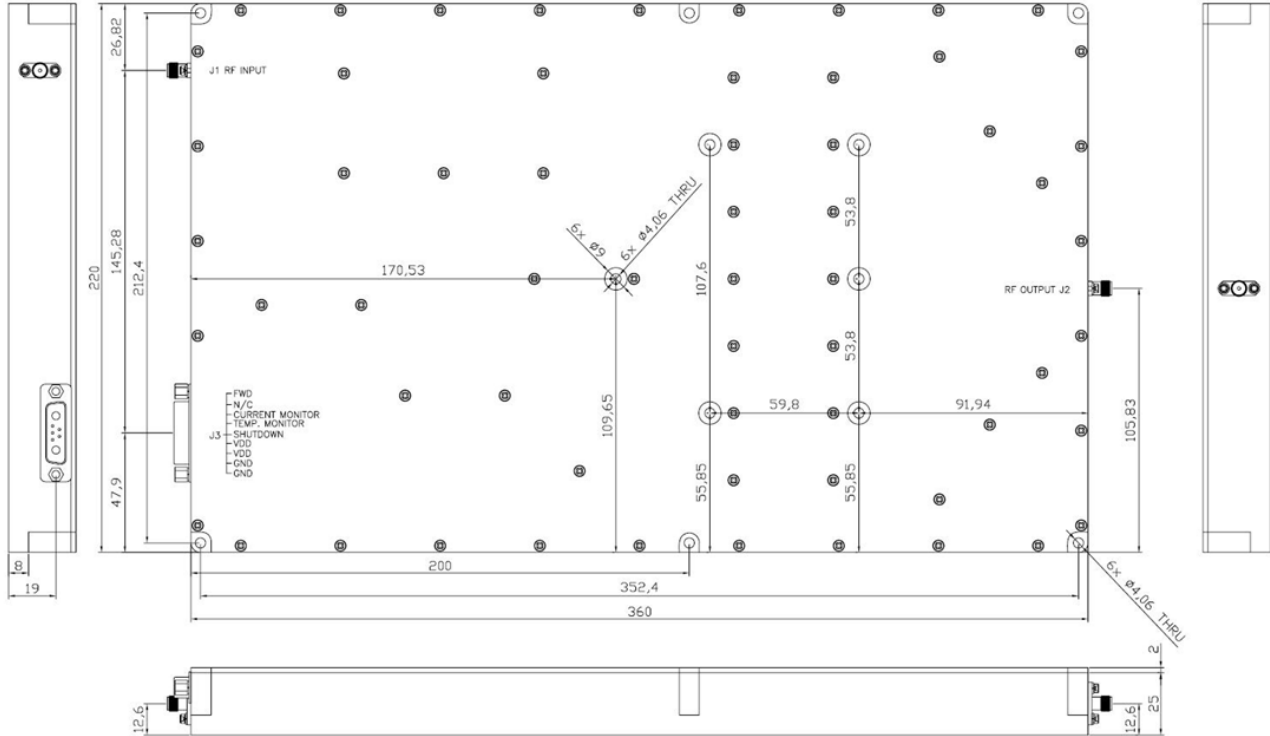

Outline Drawing - Shown With Option 108 (28V Operation)

