

HD28476

300–600MHz 6W RF Power Amplifier


Features

- Frequency Range: 300-600MHz
- Gain: 40dB
- P_{out} : +38dBm
- IP3: +46dBm
- Noise Figure: 6dB
- DC Power: 24V
- SMA Connector

Performance measured @ 450MHz

Description

HD28476 is a 6Watt (+38dBm) output RF Power Amplifier operating from single 24V DC power supply with frequency from 30MHz to 600MHz.

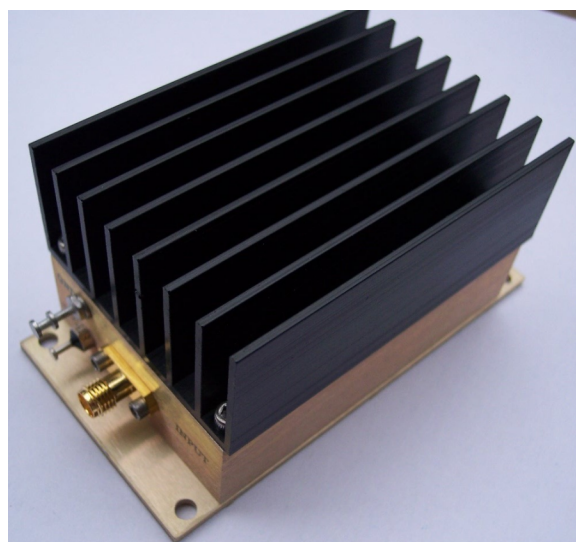

Electrical Specifications @ +25 °C, $Z_s = Z_L = 50 \Omega$, $V_{cc} = 24V$







Parameter	Unit	Minimum	Typical	Maximum
Frequency Range	MHz	300		600
Small Signal Gain	dB		40	
Gain Flatness	dB		± 0.5	
Output Power P_{out} @ $P_{in} = 0dBm$	dBm		+38	
IP3	dBm		+46	
IMD3 (Two Tone +20.5dBm Output)	dBc		51	
Reverse Isolation	dB		-50	
Noise Figure	dB		6.0	
Efficiency	%		33	
Pout =+38dBm @450MHz	VSWR Input		1.4:1	
	Output		1.4:1	
DC Power Supply	V	18	24	
Supply Current	mA		880	

HD28476

300–600MHz 6W RF Power Amplifier

Size (Excluding SMA Connector)	inch	3.750" x 2.000" x 1.913"
Weight	Oz.	9







Typical Performance @ +25 °C

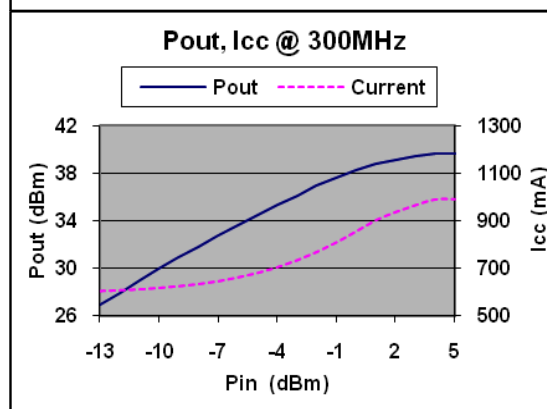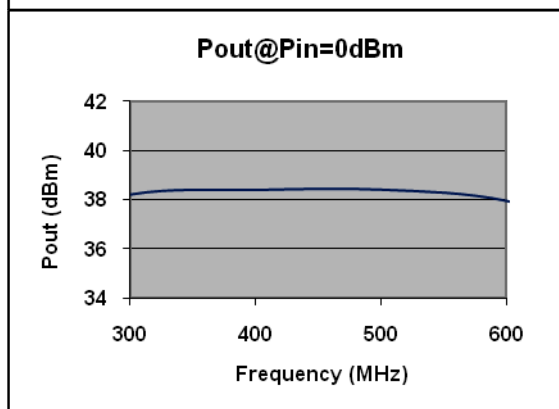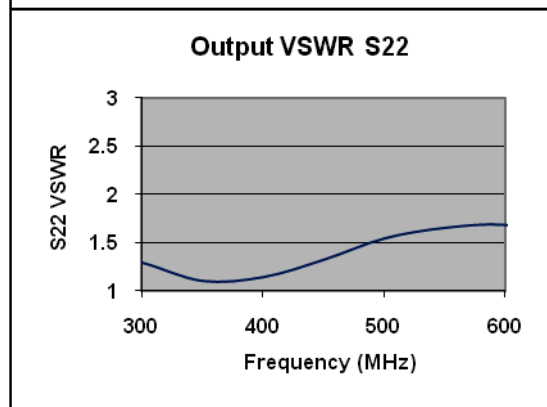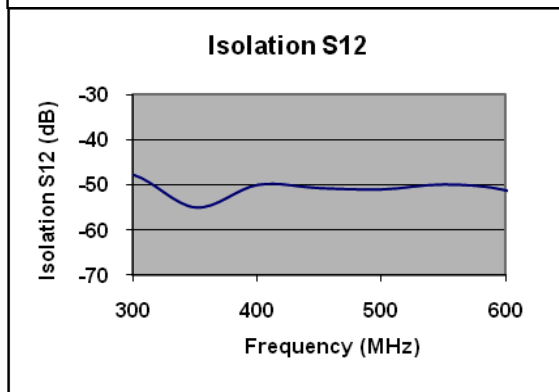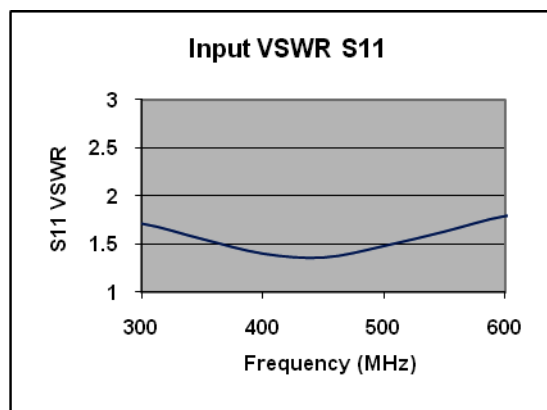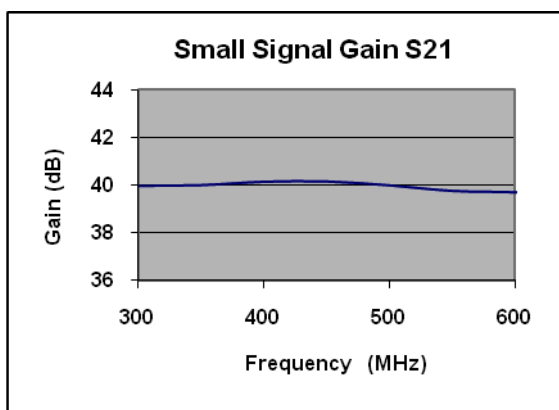

HD28476

300–600MHz 6W RF Power Amplifier


Typical Performance @ +25 °C

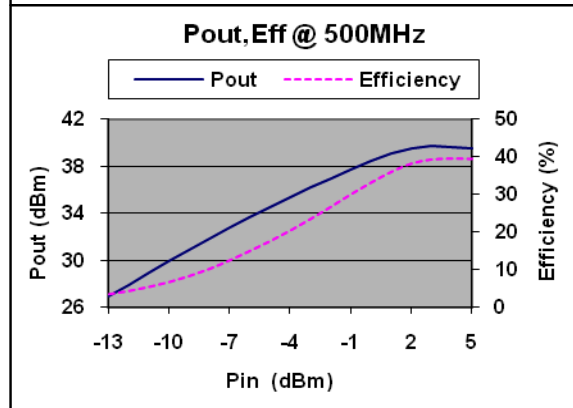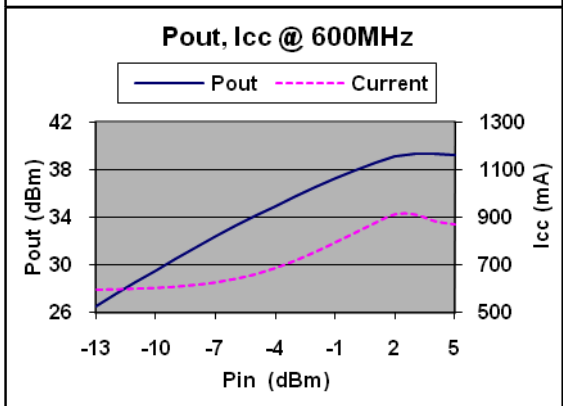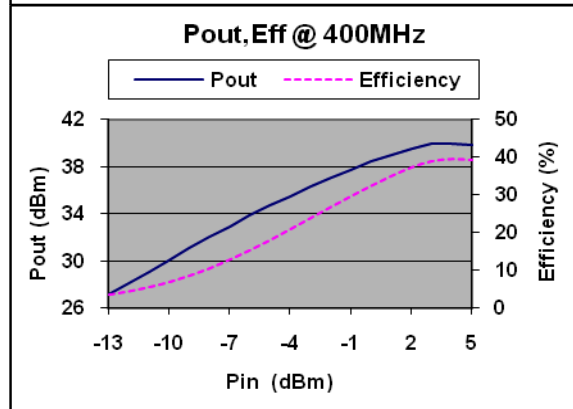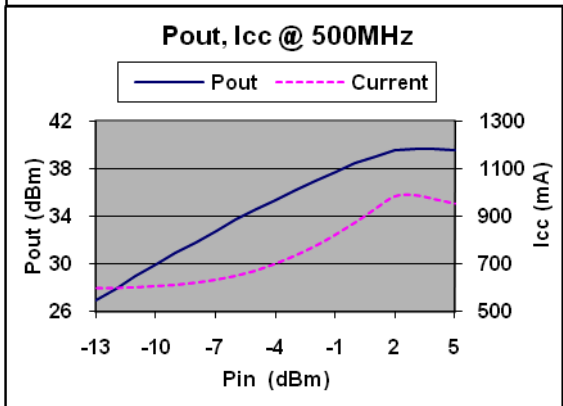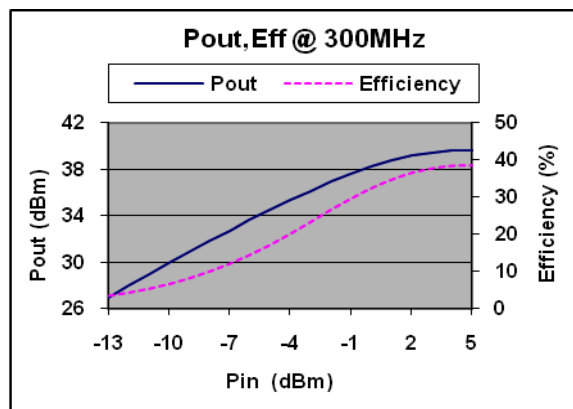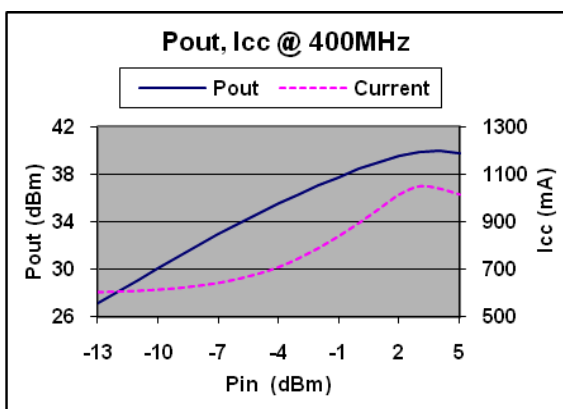

HD28476

300–600MHz 6W RF Power Amplifier

Typical Performance @ +25 °C

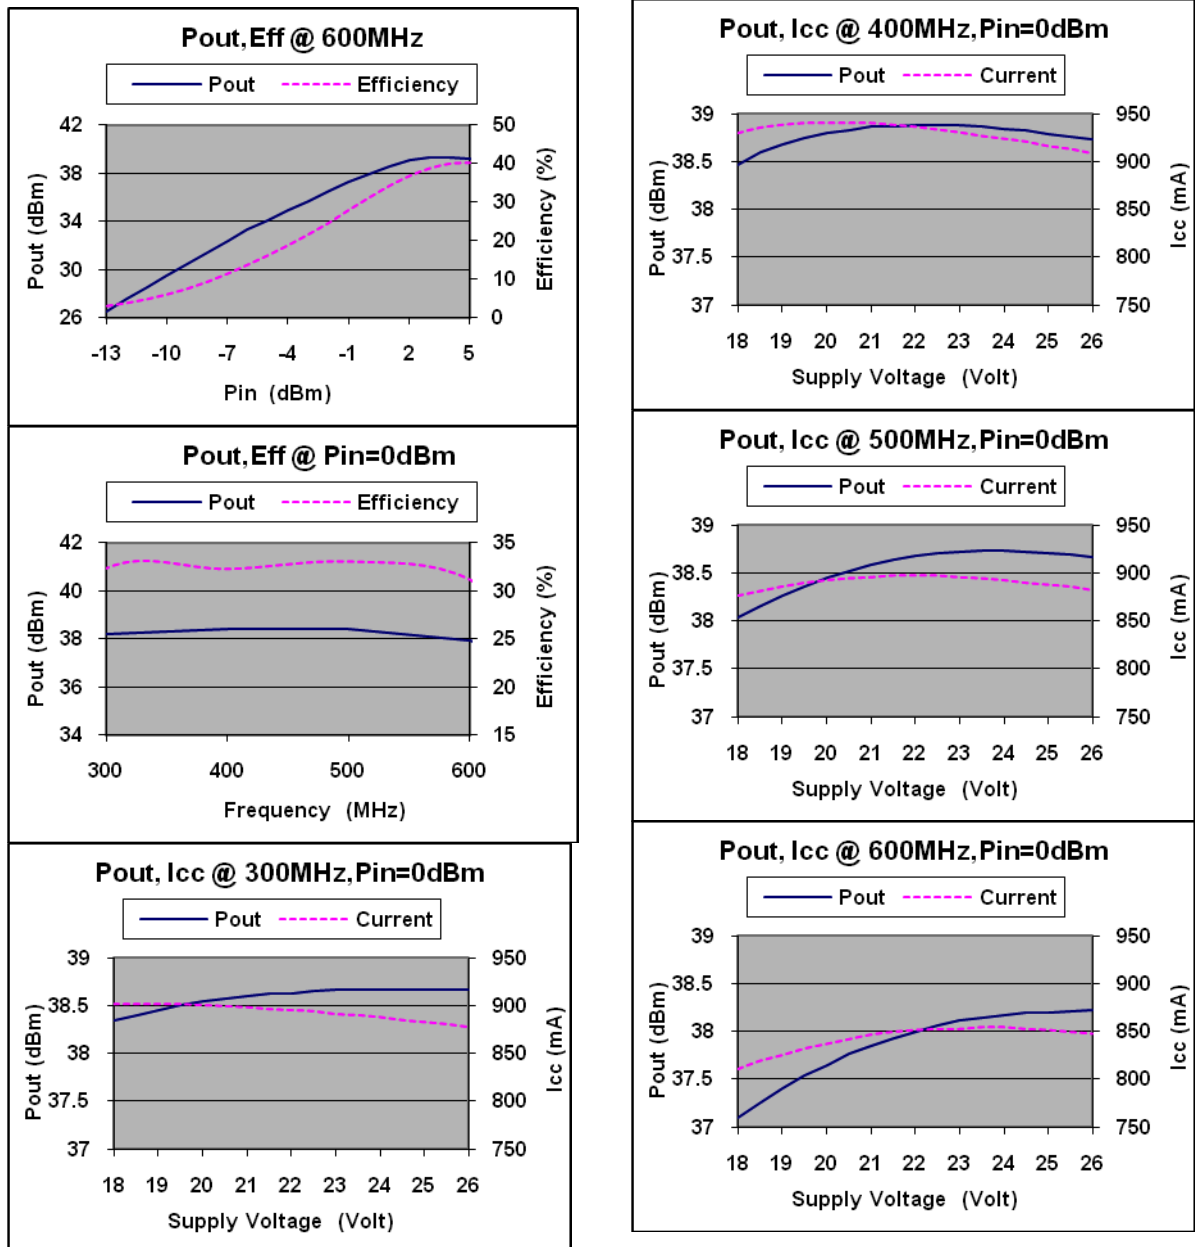




HD28476

300–600MHz 6W RF Power Amplifier

Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Input Power	+10dBm
Supply Voltage	+28V
Operating Temperature	-30 °C to +65 °C
Storage Temperature	-55 °C to +100 °C

Outline

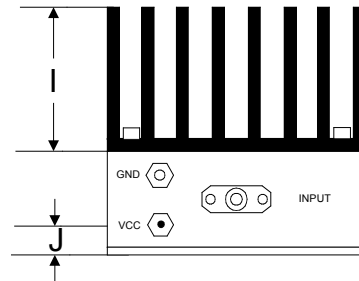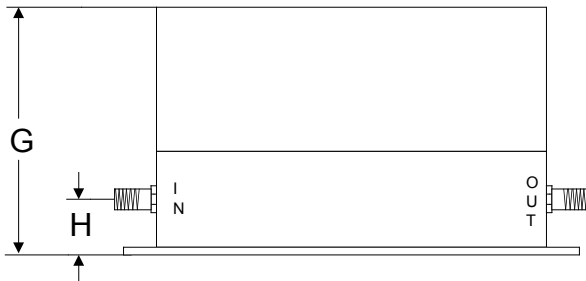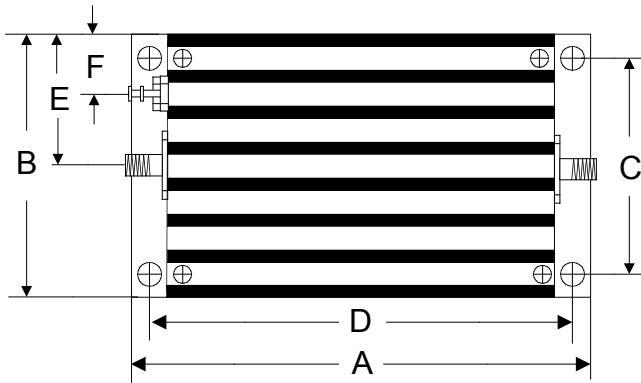

	A	B	C	D	E	F	G	H	I	J
Inch	3.750	2.000	1.750	3.400	1.000	0.400	1.913	0.375	1.000	0.238
mm	92.25	50.80	44.45	86.36	25.40	10.16	48.59	9.53	25.40	6.03

Note: Pout and Gain are not sensitive to DC power supply voltage, reducing Vcc from +24V to +18V will reduce amplifier heat by 25% with only drop of about 1dB in both Pout and Gain.