



MECHANICAL STEP ATTENUATOR

HD29969-OS/3.3V
HD29969-OS/5.0V

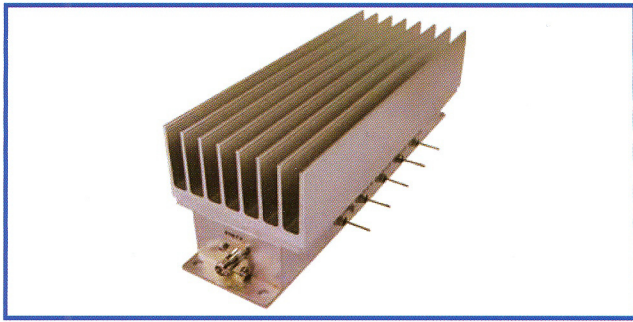

OUTLINE DRAWING

※IN MILLIMETERS

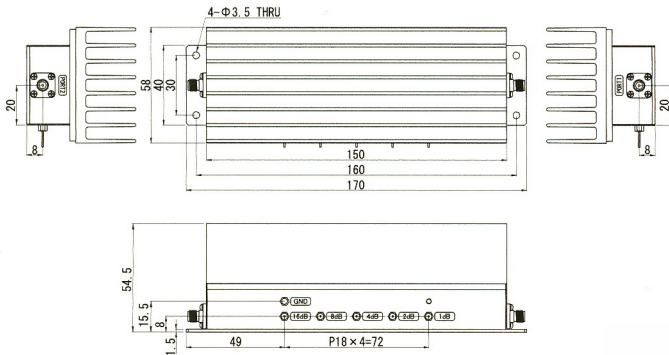

- Broadband Frequency : DC ~ 2500MHz
- Attenuation : 1dB Step/5Bit/31dB
- High Power : +40dBm (avg.)
- Input Intercept Point : +75.0dBm (min.)
- +3.3V (LVTTTL) / +5.0V (TTL) Operation
- RoHS Compliance

SPECIFICATIONS

Frequency Range	: DC ~ 2500MHz
Insertion Loss (DC-1.5GHz)	: 2.0dB (max.)
(1.5GHz- 2.5GHz)	: 3.5dB (max.)
Attenuation Range / Steps	: 31dB / 1, 2, 4, 8, 16dB
Attenuation Accuracy (DC-1.5GHz)	: ±1.0dB (max.)
(1.5GHz-2.5GHz)	: ±1.5dB (max.)
Impedance	: 50Ω
Input /Output VSWR	: 1.5 : 1 (typ.)
Logic Input (DC Drive/Standard)	: +3.3V = Att Setting / 0V = Zero Setting
(DC Drive/Option)	: +5.0V = Att Setting / 0V = Zero Setting
(TTL Drive/Option)	: High = Att Setting / Low = Zero Setting
Switching Speed	: 5ms (max.) tRise / tFall
DC Supply Input (Standard)	: +3.3V±0.5V 120mA (max.) / Step
DC Supply Input (Option)	: +5.0V±0.5V 100mA (max.) / Step
Input Intercept Point	: +75.0dBm (min.)
Maximum RF Input Power	: +40.0dBm (avg.)
Operating Temperature	: -20°C to +60°C
Storage Temperature	: -20°C to +80°C
Connectors (Standard)	: SMA-FEMALE
Connectors (Option)	: BNC-FEMALE
Weight (Standard)	: 550g (19oz) (typ.)

HOW TO ORDER

Model Name

HD29969-OS/3.3V

0 = DC Drive S = SMA - FEMALE 3.3V
 1 = TTL Drive B = BNC - FEMALE 5.0V
 ※BNC Operational to 1GHz

TYPICAL PERFORMANCE

