




# HD28076-150

## Full band UHF- 150W Solid State Broadband High Power Pallet Amplifier

The HD28076-150 is a 150W pallet amplifier for the 470-860 MHz band. This Linear Class AB pallet amplifier features Gold Metallized LDMOS transistors providing typical Peak-Sync output power of 150W. 50 Ohms input and output allows this pallet amplifier to be used as both an output PA with 150W of output power or as a driver with 70W of output power. Thermal tracking allows for superior performance in providing high gain, efficiency, and power in a small pallet footprint, making this a great choice for your Television Applications

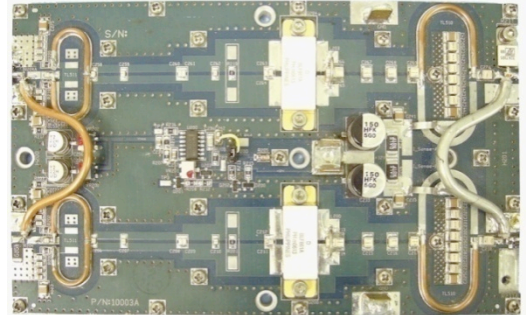

### Specifications

(Vsupply=+28V Vdc, Idq=1.6A, T<sub>Base</sub>=25°C)

Parameter	Min.	Typ	Max.	Unit
Frequency	470		860	MHz
Pout P1dB	160	195		Watts
Linear Power Out, Pk Sync	150	180		Watts
Gain	12	13		dB
Power In		5	8	Watts
Drain Current Pout=180W Pk Sync		14		Amps
Input VSWR		1.2:1	1.5:1	
2 <sup>nd</sup> Harmonic		-20		dBc
3 <sup>rd</sup> Harmonic		-35		dBc
Baseplate Operating Temp.	0		+70	°C
Size	6.2" x 3.8" x 1.0"			

### Features

- 50 Watts Class AB
- 150W Pk-Sync @ -54dBc IMD's
- 70W Pk-Sync @ -60dBc IMD's
- 13 dB Gain
- 65 Watts (avg) Digital Power out
- Selectable internal/external Bias

### Maximum Ratings

Parameter	Value
Input Voltage	+34 VDC
Bias Current	3.0 Amp
Drain Current	16 Amp
Load Mismatch All Phase angles	3:1
Baseplate Temp	+70°C
Storage Temp	-40° - +105°C

HD Communications Corp.  
2180 Fifth Avenue, Unit 4, Ronkonkoma, NY 11779  
Tel: (631) 588-3877 Fax: (631) 588-3879 Email: sales@rfamplifiers.com

